

WOCA Hardwax Oil

– for the basic finish of wood floors with polishing machine



Easy and effective. *Naturally*



- For the basic finish of wood floors with polishing machine
- Suitable for all types of wood floors
- Suitable for large areas
- Filmbuilding
- Certified by IBR

Product info

Container: 0,75 litre and 2,5 litre

Consumption: 8-12 m²/l
depending on the wood type

Available in natural and extra white



Application area

WOCA Hardwax Oil is a professional floor finish. The oil ensures an extremely hard-wearing and light film-building surface. Can be used on any unfinished, new or newly sanded interior woodwork or for a topcoat on WOCA Colour Oils.

Result

Due to saturation with oil the wood surface is protected against water and dirt. The surface is extremely robust.

Application

Apply the oil in a thin layer with a short-haired roller or similar in an even coat.

After care

Not required.

Maintaining and cleaning

Regular cleaning: Natural Soap or Oil Refresher. Re-oil with WOCA Hardwax Oil or Maintenance Paste when required.

How to do...

– WOCA Hardwax Oil

For the basic finish of wood floors with polishing machine




Easy and effective. Naturally



1



2

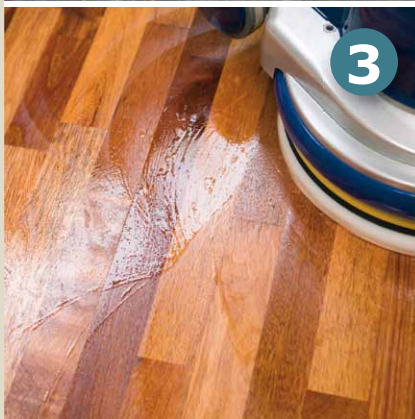

3



4

Tools

A polishing machine with beige or white polishing pad. Paintroller and cotton cloths.

Clean tools with Solvent.

Please notice!

Risk of self-ignition! Due to the risk of self-ignition it is important that sanding dust and oil wetted cloths are soaked in water and disposed of in a tightly closed container after use.

WOCA Hardwax Oil is used for oil finishing of wooden floors manually or with polishing machine. The oil ensures an extremely hard-wearing and light film-building surface.

WOCA Hardwax Oil is ideal for basic finishing of any unfinished, new and newly sanded interior woodwork, or for topcoat on WOCA Colour Oils. Polishing machine is recommended for the polishing of large areas.

Preparation

The unfinished woodwork should be freshly sanded with grit 100-120. The floor must be completely dry and free from dirt and grease before the oil application. Recommended wood-moisture max. 12%. Product, room and floor temperature should be between 15°C-30°C. Ensure good ventilation at all times during the application and drying time.

- 1 The floor can be cleaned with WOCA Wood Cleaner mixed with water 1:40 if necessary. Leave floor to dry fully before oil application.
- 2 Stir and mix oil container well before and during use. Containers with different batch numbers should be mixed before use to avoid colour differences. Apply the oil in a thin layer with a short-haired roller or similar in an even coat. Leave the oil to be absorbed for 20 minutes.

- 3 The area is now polished with white or beige polishing pad under doodle-bug or with polishing machine until the excess oil is polished in, and the area appears saturated. Leave the floor to dry for 8-10 hours. If necessary a second coat can be applied.
- 4 The floor can be used with care the next day and is fully hardened after 3 days at normal indoor conditions. Do not clean the floor until fully hardened. After the hardening time, the floor should be cleaned with Natural Soap or Oil Refresher, which leaves a protecting layer on the surface.

Tools may be cleaned with WOCA Solvent.

Maintenance

Regular cleaning: Natural Soap or Oil Refresher. Re-oil with WOCA Hardwax Oil or Maintenance Paste when required.